

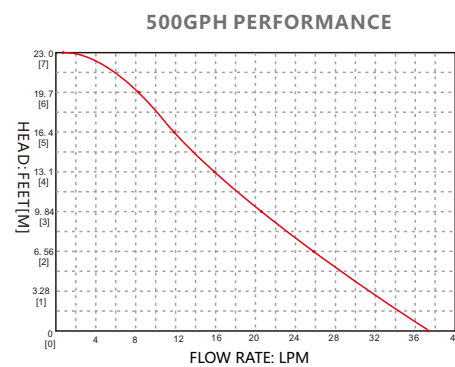


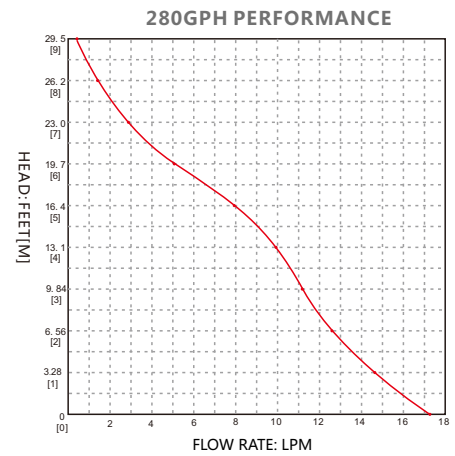

## SUBMERSIBLE AND LINE PUMP 280/500 GPH

### Features & Benefits

- Able to pump 40 °C diesel , 80 °C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty
- "A" refers to 5m leads with clip, "B" refers to 1m leads

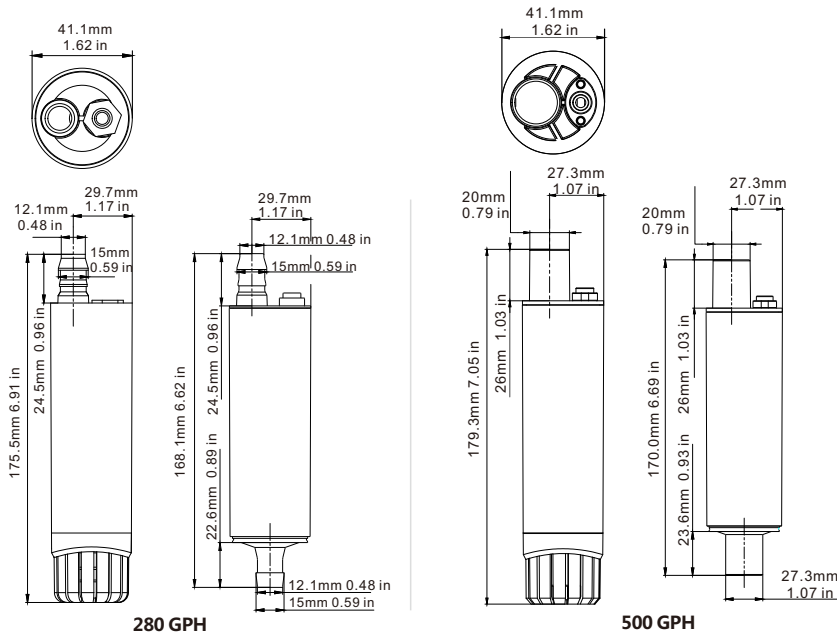

### STANDARD PUMP CONFIGURATIONS

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02A	280 GPH	12 V	4.5 A	7.5 A	10 m / 32'	5 m / 16'	1/2"
SFSP1-G280-02B	280 GPH	12 V	4.5 A	7.5 A	10 m / 32'	1 m / 3'	1/2"
SFSP1-G500-02A	500 GPH	12 V	4.5 A	7.5 A	10 m / 32'	5 m / 16'	3/4"
SFSP1-G500-02B	500 GPH	12 V	4.5 A	7.5 A	10 m / 32'	1 m / 3'	3/4"