



## WASHDOWN PUMP KIT

### FEATURES & BENEFITS

- 6M UV-protected Coiled Hose Coil
- 2M Inlet Hose
- Easy to use, store, and carry on
- Adjustable sprayer
- Built-in by pass valve
- Smooth flowing
- Quiet Operation
- 16 AWG, 4.5" long Leads



### PUMP

- Liquid temperature**  
140 °F ( 60 °C ) Max.
- Priming Capabilities**  
6 feet(1.8 m) suction lift
- Max Pressure**  
70 PSI (4.8 BAR)
- Weight**  
11 lbs (5 kg)

### Standard Accessories



More details and other optional accessories please refer to page 87-88

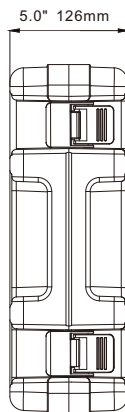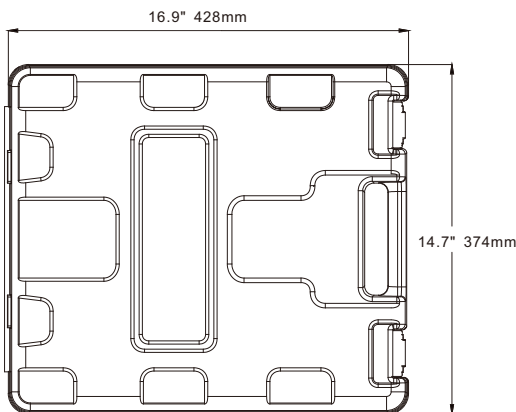

Color Box

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-045-070-41	12V	4.5 / 17.0	Demand & By pass	17.0	70 / 4.8	EPDM	Santoprene	Quick attach	2-Pin/Leads